

# Filter Cart

Fuel Purifier Cart - Kraftstofffilter Kart  
 Filtre/Carbur Panier - Filtro/Combs Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

TURBINE SERIES  
 ELECTRIC PUMP DRIVEN

Purifies: DIESEL, BIODIESEL

Small bulk fuel storage tanks  
 Medium sized machinery fuel tanks  
 Compressor & Gen Set fuel tanks

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) AQUABLOCK  
 Filter Rating Primary 2µ  
 Filter Bowl Primary TRANSPARENT  
 Filter Drain Valve SELF-VENTING  
 Pump Bypass YES

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Motor Type Main ELECTRIC  
 Electric Motor (Main) 1/3 HP  
 Electric Motor Vca/Hz 220/50  
 Electric Motor Consumption 1.2-2 A  
 Electric Protection IP55/3000 RPM

Fluid Flow Rate (Ltrs) 25  
 Fluid Flow Rate (Gals) 6.7

Number - Nummer - Numero - Numero

**DEP10R**



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
 980.00 1000.00

Diameter - Durchmesser - Diametre - Diametro  
 O.D. 400.00 480.00 520.00

Remarks - Bemerkung - Remarque - Observacione

Weight 14 KG / 30.8 LBS

Filter Options: 10 µ & 30 µ

Model C110/1000FH Seal kit C1111404

Pieces/Carton - Stück/Karton - Pieces/Carton - Pieza/Caja

1 (1 pal.)

**Service-Info**

# Filter Cart

Fuel Purifier Cart - Kraftstofffilter Kart  
 Filtre/Carbur Panier - Filtro/Combs Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

GASOLINE TANK FILTER SYSTEM

Purifies: GASOLINE, PETROL, KEROSENE

Used in Medium bulk fuel storage tanks

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) AQUABLOCK

Filter Rating Primary 2μ

Filter Bowl Primary METAL

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Electric Motor (Main) 0.18 KW

Electric Motor Vca/Hz 220

Pump Type Main ATEX GASOLINE

Fluid Flow Rate (Ltrs) 25

Fluid Flow Rate (Gals) 6.7

Number - Nummer - Numero - Numero

## DEP10RANTI



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
 1000.00

Diameter - Durchmesser - Diametre - Diametro  
 O.D. 400.00 590.00

Remarks - Bemerkung - Remarque - Observacione


Filter options: 10μ & 30μ

Weight (dry): 26 KG / 57 LBS

Pieces/Cartron - Stück/Karton - Pieces/Cartron - Pieza/Caja

1 (1 pal.)

Service-Info



# Filter Cart

Fuel Purifier Cart - Kraftstofffilter Kart  
Filtre/Carbur Panier - Filtro/Combs Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

PNEUMATIC DRIVEN

Purifies: DIESEL, BIODIESEL

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) AQUABLOCK

Filter Rating Primary 2μ

Filter Bowl Primary TRANSPARENT

Filter Drain Valve SELF-VENTING

Fuel/Water Separation 100%

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Pump Type Main PNEUMATIC

Pneumatic Pump: Free maximum flow 50 lpm

Pressure range from 3 to 7 bars

Suction rate of 8 meters.

Fluid Flow Rate (Ltrs) 25

Fluid Flow Rate (Gals) 6.7

Number - Nummer - Numero - Numero

**DEP10RNEU**



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
1000.00

Diameter - Durchmesser - Diametre - Diametro  
O.D. 400.00 580.00

Remarks - Bemerkung - Remarque - Observacione

Inlet and outlet: 1/2" BSP

Weight (dry): 20 KG / 44 LBS

Pieces/Cartron - Stück/Karton - Pieces/Cartron - Pieza/Caja

1 (1 pal.)

Service-Info

# Filter Cart

Fuel Purifier Cart - Kraftstofffilter Kart  
 Filtre/Carbur Panier - Filtro/Combs Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

MEDIUM FLOW SERIES  
 ELECTRIC PUMP DRIVEN

Purifies: DIESEL, BIODIESEL

Used in medium bulk fuel storage tanks

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) SUCTION SIDE  
 Filter Element Secondary PRESSURE SIDE  
 Filter Rating Primary 5µ  
 Filter Rating Secondary 25µ  
 Filtration Type PRIMARY/SECONDARY  
 Fuel/Water Separation 100%

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Electric Motor (Main) 3/4 HP (500W)  
 Electric Motor Vca/Hz 220/50  
 Electric Protection IP-55/3800 RPM  
 Electric Motor Consumption 3.6 A  
 Filter Guage (Secondary) YES

Fluid Flow Rate (Ltrs) 65  
 Fluid Flow Rate (Gals) 17.29

Number - Nummer - Numero - Numero

**DEP65RLPM**



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
 1000.00

Diameter - Durchmesser - Diametre - Diametro  
 O.D. 610.00 710.00

Remarks - Bemerkung - Remarque - Observacione

Filter Options: 1 µ, 5 µ & 10 µ  
 (Pressure side)

Weight (dry): 32 KG / 70.55 LBS

Pieces/Carton - Stück/Karton - Pieces/Carton - Pieza/Caja

1 (1 pal.)

**Service-Info**

# Filter Cart

Fuel Purifier Cart - Kraftstofffilter Kart  
 Filtre/Carbur Panier - Filtro/Combs Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

TURBINE SERIES  
 ELECTRIC PUMP DRIVEN

Purifies: DIESEL, BIODIESEL

Used in medium bulk fuel storage tanks  
 up to 135 Ltrs / 35 Gals.

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) AQUABLOCK  
 Filter Rating Primary 2µ  
 Filter Bowl Primary TRANSPARENT  
 Filter Drain Valve SELF-VENTING

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Electric Motor (Main) 1/3 HP  
 Electric Motor Consumption 1.2-2 A  
 Electric Protection IP-55/3000 RPM  
 Electric Motor Vca/Hz 220/50

Fluid Flow Rate (Ltrs) 35  
 Fluid Flow Rate (Gals) 9.46

Number - Nummer - Numero - Numero

**DEP73R**



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
 980.00

Diameter - Durchmesser - Diametre - Diametro  
 O.D. 580.00 460.00

Remarks - Bemerkung - Remarque - Observacione

Filter Options: 10 µ & 30 µ

Weight (dry): 17 KG / 37.4 LBS

Model C273/1000FH Seal kit C2111040

Pieces/Cartron - Stück/Karton - Pieces/Cartron - Pieza/Caja

1 (1 pal.)

**Service-Info**

# Filter Cart

Fuel Purifier Cart - Kraftstofffilter Kart  
 Filtre/Carbur Panier - Filtro/Combs Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

TURBINE SERIES  
 ELECTRIC PUMP DRIVEN

Purifies: DIESEL, BIODIESEL

Used in bulk fuel storage tanks larger than 135 Ltrs / 35 Gals.

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) AQUABLOCK  
 Filter Rating Primary 2µ  
 Filter Bowl Primary TRANSPARENT  
 Filter Drain Valve SELF-VENTING  
 Pump Bypass YES

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Electric Motor (Main) 0.5 HP  
 Electric Motor Vca/Hz 220/50  
 Electric Motor Consumption 3.6 A  
 Electric Protection IP-55/3800 RPM

Fluid Flow Rate (Ltrs) 52  
 Fluid Flow Rate (Gals) 14.05

Number - Nummer - Numero - Numero

**DEP77R**



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
 980.00

Diameter - Durchmesser - Diametre - Diametro  
 O.D. 650.00 700.00

Remarks - Bemerkung - Remarque - Observacione

Filter Options: 10 µ & 30 µ  
 Weight (dry): 42 KG / 92.4 LBS  
 Model C377/1000FH Seal kit C3111404

Pieces/Cartron - Stück/Karton - Pieces/Cartron - Pieza/Caja

1 (1 pal.)

**Service-Info**

# Filter Cart

Fuel Purifier Cart - Kraftstofffilter Kart  
 Filtre/Carbur Panier - Filtro/Combs Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

MEDIUM FLOW SERIES  
 ELECTRIC PUMP DRIVEN

Purifies: DIESEL, BIODIESEL

Used in Medium bulk fuel storage tanks

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) SUCTION SIDE  
 Filter Element Secondary PRESSURE SID  
 Filter Rating Primary 5µ  
 Filter Rating Secondary 25µ  
 Filtration Type PRIMARY/SECONDARY  
 Filter Bowl Primary TRANSPARENT  
 Filter Guage (Secondary) YES  
 Fuel/Water Separation 100%


Crosses - Wettbewerb - Ref. Concurrence - Competencia

Electric Motor (Main) 1 HP  
 Electric Motor Vca/Hz 220/50  
 Electric Motor Consumption 3.6 A  
 Electric Protection IP-55/3800 RPM

Fluid Flow Rate (Ltrs) 95  
 Fluid Flow Rate (Gals) 25.27

Number - Nummer - Numero - Numero

## DEP80R

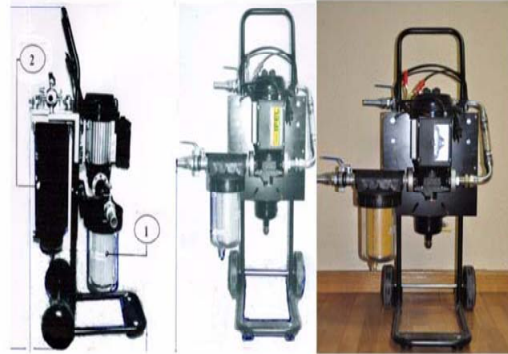

Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
 1000.00

Diameter - Durchmesser - Diametre - Diametro  
 O.D. 610.00 710.00

Remarks - Bemerkung - Remarque - Observacione


Filter Options: 1 µ, 5 µ & 10 µ  
 (Pressure side)

Weight (dry): 40 KG / 88.18 LBS

Pieces/Cartron - Stück/Karton - Pieces/Cartron - Pieza/Caja

1 (1 pal.)

Service-Info



# Filter Cart

Fuel Purifier Cart - Kraftstofffilter Kart  
Filtre/Carbur Panier - Filtro/Combs Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

HIGH FLOW SERIES  
ELECTRIC PUMP DRIVEN

Purifies: DIESEL, BIODIESEL

Used in Large bulk fuel storage tanks

Original No. - Original Nr. - No. d'origine - No. original

Filtration Type PRIMARY  
Filter Media Primary 5µ  
Filter Bowl Primary TRANSPARENT  
Filter Drain Valve YES  
Filter Feed COMMON RAIL


Crosses - Wettbewerb - Ref. Concurrence - Competencia

Electric Motor (Main) 1.1 KW  
Electric Motor Consumption 5 TO 9 A  
Electric Motor Vca/Hz 230-240/50  
Pump Type Main CENTRIFUGAL 100-500L  
Pump Type Priming 0.5 HP 230/50  
Pump Speed 2800  
Pump Continuous Duty S1

Fluid Flow Rate 280 (ltrs) 74.47 (Gals)

Number - Nummer - Numero - Numero

**DEP280**

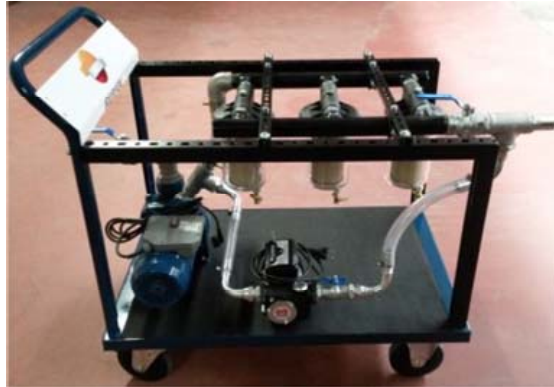

Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
1000.00

Diameter - Durchmesser - Diametre - Diametro  
O.D. 600.00 1270.00

Remarks - Bemerkung - Remarque - Observacione


Weight (dry): 80 KG / 176 LBS

Pieces/Carton - Stück/Karton - Pieces/Carton - Pieza/Caja

1 (1 pal.)

Service-Info





# Filter Case

Fuel Purifier Case - Kraftstofffilter Koffer  
Filtre/Carbur Case - Filtro/Combs Caso

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

GASOLINE TANK FILTER SYSTEM  
PORTABLE CARRYCASE

Purifies: GASOLINE, PETROL, KEROSENE

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) CELLULOSE  
Filter Element Secondary AQUABLOCK  
Filter Rating Primary 25µ  
Filter Rating Secondary 10µ  
Filter Bowl Secondary TRANSPARENT  
Fuel/Water Separation 100%

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Pump Type Main 220 VCA  
Pump Type Main SELF SUCTION

Fluid Flow Rate (Ltrs) 2

Number - Nummer - Numero - Numero

**DEPM2GR**



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
480.00

Diameter - Durchmesser - Diametre - Diametro  
O.D. 350.00 600.00

Remarks - Bemerkung - Remarque - Observacione

Weight (dry): 8 KG / 17.64 LBS

Pieces/Cartron - Stück/Karton - Peces/Cartron - Pieza/Caja

1 (1 pal.)

**Service-Info**



# Filter Case

Fuel Purifier Case - Kraftstofffilter Koffer  
Filtre/Carbur Case - Filtro/Combs Caso

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

GASOLINE TANK FILTER SYSTEM  
PORTABLE CARRYCASE

Purifies: GASOLINE, PETROL, KEROSENE

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) CELLULOSE  
Filter Element Secondary AQUABLOCK  
Filter Rating Primary 25µ  
Filter Rating Secondary 10µ  
Filter Bowl Secondary TRANSPARENT  
Fuel/Water Separation 100%

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Pump Type Main 220 VCA  
Pump Type Main SELF SUCTION

Fluid Flow Rate (Ltrs) 2

Number - Nummer - Numero - Numero

**DEPM2GR**



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
480.00

Diameter - Durchmesser - Diametre - Diametro  
O.D. 350.00 600.00


Remarks - Bemerkung - Remarque - Observacione

Weight (dry): 8 KG / 17.64 LBS

Pieces/Cartron - Stück/Karton - Pieces/Cartron - Pieza/Caja

1 (1 pal.)

Service-Info



# Filter Cart

Fuel Purifier Cart - Kraftstofffilter Kart  
Filtre/Carbur Panier - Filtro/Combs Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

LOW COST SYSTEM  
ELECTRIC PUMP DRIVEN

Purifies: DIESEL, BIODIESEL

Used in Medium bulk fuel storage tanks

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) SUCTION SIDE  
Filter Element Secondary PRESSURE SID  
Filter Rating Primary 5 $\mu$   
Filter Rating Secondary 25 $\mu$   
Filtration Type PRIMARY/SECONDARY  
Filter Drain Valve SELF-VENTING

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Electric Motor (Main) 0.5 HP  
Electric Motor Consumption 3.6 A  
Electric Motor Vca/Hz 220/50  
Electric Protection IP-55/3800 RPM

Fluid Flow Rate (Ltrs) 40

Fluid Flow Rate (Gals) 10.64

Number - Nummer - Numero - Numero

## ECODEP40R



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
1000.00

Diameter - Durchmesser - Diametre - Diametro  
O.D. 470.00 600.00

Remarks - Bemerkung - Remarque - Observacione


Filter Options: 1  $\mu$ , 5  $\mu$  & 10  $\mu$   
(Pressure side)

Weight (dry): 22 KG / 48.5 LBS

Pieces/Cartron - Stück/Karton - Pieces/Cartron - Pieza/Caja

1 (1 pal.)

Service-Info



# Filter Cart

Fuel Purifier Cart - Kraftstofffilter Kart  
Filtre/Carbur Panier - Filtro/Combs Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

LOW COST SYSTEM  
ELECTRIC PUMP DRIVEN

Purifies: DIESEL, BIODIESEL

Used in Medium bulk fuel storage tanks

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) SUCTION SIDE  
Filter Element Secondary PRESSURE SID  
Filter Rating Primary 5µ  
Filter Rating Secondary 25µ  
Filter Guage (Secondary) YES  
Filter Bowl Primary TRANSPARENT  
Filter Drain Valve SELF-VENTING

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Electric Motor (Main) 1 HP  
Electric Motor Consumption 3.6 A  
Electric Motor Vca/Hz 220/50  
Electric Protection IP-55/3800 RPM

Fluid Flow Rate (Ltrs) 90  
Fluid Flow Rate (Gals) 21.28

Number - Nummer - Numero - Numero

## ECODEP90R



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
1000.00

Diameter - Durchmesser - Diametre - Diametro  
O.D. 470.00 620.00

Remarks - Bemerkung - Remarque - Observacione

Filter Options: 1 µ, 5 µ & 10 µ  
(Pressure side)

Weight (dry): 27 KG / 59.52 LBS

Pieces/Carton - Stück/Karton - Pieces/Carton - Pieza/Caja

1 (1 pal.)

Service-Info



# Filter Assy.

Fuel Filter Assembly - Kraftstoff/Filtr Kit  
Filtre Carburant Kit - Fil/Combustible Kit

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

FG60 ASSEMBLY

Filters/Purifies and removes water from:  
DIESEL/BIODIESEL, GASOLINE/PETROL  
and KEROSENE

Original No. - Original Nr. - No. d'origine - No. original

Filter Rating Primary 5µ  
Fuel/Water Separation 98%  
Filter Bowl Primary TRANSPARENT  
Filter Drain Valve YES

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Bowl capacity: 1 litre  
Pressure resistant to 6 bars  
Filter head: THERMO PLASTIC  
Suction side or pressue side operation  
Filtration capacity: 250,000 ltr (clean)

Number - Nummer - Numero - Numero

**FG60**



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
260.00

Diameter - Durchmesser - Diametre - Diametro  
O.D. 150.00

Remarks - Bemerkung - Remarque - Observacione

Replacement element: FG60 Element

Inlet and outlet: 3/4" BSP

Nett Weight: 2 kg / 4 lbs.

Pieces/Carton - Stück/Karton - Pieces/Carton - Pieza/Caja

1 (1 pal.)

**Service-Info**

# Filter Assy.

Fuel Filter Assembly - Kraftstoff/Filtr Kit  
 Filtre Carburant Kit - Fil/Combustible Kit

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

FG105 ASSEMBLY

Filters/Purifies and removes water from:  
 DIESEL/BIODIESEL, GASOLINE/PETROL  
 and KEROSENE

Quick and easy maintenance system

Original No. - Original Nr. - No. d'origine - No. original

Filter Rating Primary 5µ  
 Fuel/Water Separation 98%  
 Filter Drain Valve YES  
 Filter Bowl Primary TRANSPARENT  
 Pressure resistant to 6 bars  
 Filter head: THERMO PLASTIC  
 Filtration capacity: 500.000 liters

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Mounting head includes port for optional  
 pressure or vacuum gauge.  
 Optional: installation kit consisting of  
 support pillar and two threaded tubes  
 Suction side or pressue side operation

Fluid Flow Rate (Ltrs) 105

Number - Nummer - Numero - Numero

**FG105**



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
 340.00

Diameter - Durchmesser - Diametre - Diametro  
 O.D. 175.00

Remarks - Bemerkung - Remarque - Observacione

Replacement element: FG105002  
 Inlet and outlet: 1" BSP  
 Element Replacement Tool: FG105001  
 Filter Bracket: FG105003  
 Optional Vacuumeter: FG105004

Nett Weight: 2.1 kg

Pieces/Cartron - Stück/Karton - Pieces/Cartron - Pieza/Caja

1 (1 pal.)

**Service-Info**



# Filter Assy.

Fuel Filter Assembly - Kraftstoff/Filtr Kit  
Filtre Carburant Kit - Fil/Combustible Kit

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

FG105 DOUBLE ASSEMBLY

Filters/Purifies and removes water from:  
DIESEL/BIODIESEL, GASOLINE/PETROL  
and KEROSENE

Original No. - Original Nr. - No. d'origine - No. original

Filter Rating Primary 5µ  
Filter Bowl Primary TRANSPARENT  
Filter Drain Valve YES  
Fuel/Water Separation 98%  
Pressure resistant to 6 bars  
Filter head: THERMO PLASTIC

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Mounting head includes port for optional  
pressure or vacuum gauge.

Suction side or pressue side operation

Fluid Flow Rate (Ltrs) 210  
Fluid Flow Rate (Gals) 55.85

Number - Nummer - Numero - Numero

## FG105 DOUBLE



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
360.00

Diameter - Durchmesser - Diametre - Diametro  
O.D. 360.00 420.00

Remarks - Bemerkung - Remarque - Observacione

Replacement element :FG105002  
Element Replacement Tool: FG105001  
Inlet and outlet: 1"-1/4 BSP

Nett Weight: 8 kg / 17.64 lbs

Pieces/Carton - Stück/Karton - Pieces/Carton - Pieza/Caja

1 (1 pal.)

Service-Info

# Filter Assy.

Fuel Filter Assembly - Kraftstoff/Filtr Kit  
 Filtre Carburant Kit - Fil/Combustible Kit

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

FG105 QUADRUPLE ASSEMBLY

Filters/Purifies and removes water from:  
 DIESEL/BIODIESEL, GASOLINE/PETROL  
 and KEROSENE

Original No. - Original Nr. - No. d'origine - No. original

Filter Rating Primary 5µ  
 Filter Bowl Primary TRANSPARENT  
 Filter Drain Valve YES  
 Fuel/Water Separation 98%  
 Pressure resistant to 6 bars  
 Filter head: THERMO PLASTIC

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Mounting head includes port for optional  
 pressure or vacuum guage.

Suction side or pressue side operation

Fluid Flow Rate (Ltrs) 420

Fluid Flow Rate (Gals) 111.70

Number - Nummer - Numero - Numero

## FG105 QUADRUPLE



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauter - Altura  
 360.00

Diameter - Durchmesser - Diametre - Diametro  
 O.D. 360.00 880.00

Remarks - Bemerkung - Remarque - Observacione

Replacement element: FG105002  
 Element Replacement Tool: FG105001

Inlet and outlet: 1"-1/2 BSP

ett Weight: 16 kg / 35.27 lbs

Pieces/Carton - Stück/Karton - Pieces/Carton - Pieza/Caja

1 (1 pal.)



# Filter Assy.

Fuel Filter Assembly - Kraftstoff/Filtr Kit  
 Filtre Carburant Kit - Fil/Combustible Kit

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

FG105 QUINTUPLE ASSEMBLY

Filters/Purifies and removes water from:  
 DIESEL/BIODIESEL, GASOLINE/PETROL  
 and KEROSENE

Original No. - Original Nr. - No. d'origine - No. original

Filter Rating Primary 5µ  
 Filter Bowl Primary TRANSPARENT  
 Filter Drain Valve YES  
 Fuel/Water Separation 98%  
 Pressure resistant to 6 bars  
 Filter head: THERMO PLASTIC

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Mounting head includes port for optional  
 pressure or vacuum gauge.

Suction side or pressue side operation

Fluid Flow Rate (Ltrs) 525

Fluid Flow Rate (Gals) 139.63

Number - Nummer - Numero - Numero

## FG105 QUINTUPLE



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
 360.00

Diameter - Durchmesser - Diametre - Diametro  
 O.D. 360.00 1110.00

Remarks - Bemerkung - Remarque - Observacione

Replacement element: FG105002

Nett Weight: 20 kg / 44.09 lbs

Inlet and outlet: 1"-1/2 BSP

Nett Weight: 20 kg / 44.09 lbs

Pieces/Cartron - Stück/Karton - Pieces/Cartron - Pieza/Caja

1 (1 pal.)



# Filter Assy.

Fuel Filter Assembly - Kraftstoff/Filtr Kit  
Filtre Carburant Kit - Fil/Combustible Kit

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

FG105 TRIPLE ASSEMBLY

Filters/Purifies and removes water from:  
DIESEL/BIODIESEL, GASOLINE/PETROL  
and KEROSENE

Original No. - Original Nr. - No. d'origine - No. original

Filter Rating Primary 5µ  
Filter Bowl Primary TRANSPARENT  
Filter Drain Valve YES  
Fuel/Water Separation 98%  
Pressure resistant to 6 bars  
Filter head: THERMO PLASTIC

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Mounting head includes port for optional  
pressure or vacuum gauge.

Suction side or pressue side operation

Fluid Flow Rate (Ltrs) 315  
Fluid Flow Rate (Gals) 83.78

Number - Nummer - Numero - Numero

## FG105 TRIPLE



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
360.00

Diameter - Durchmesser - Diametre - Diametro  
O.D. 360.00 650.00

Remarks - Bemerkung - Remarque - Observacione

Replacement element: FG105002  
Element Replacement Tool: FG105001


Inlet and outlet: 1"-1/2 BSP

Nett Weight: 12 kg / 26.46 lbs

Pieces/Cartron - Stück/Karton - Pieces/Cartron - Pieza/Caja

1 (1 pal.)

**Service-Info**



# Filter

F/W Separator CT - T/W-Separator Cartg.  
Séparateur/EauCartg. - Separador AguaCartg.

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

FG105 ELEMENT

Original No. - Original Nr. - No. d'origine - No. original

Cellulose media with metal support  
98% water separation

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Number - Nummer - Numero - Numero

**FG105002**



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
195.00

Diameter - Durchmesser - Diametre - Diametro  
O.D. 98.00  
I.D. 50.00

Remarks - Bemerkung - Remarque - Observacione

Replacement element for FG105 series

Can be used to filter diesel, biodiesel,  
gasoline and kerosene fuels.

Pieces/Carton - Stück/Karton - Pieces/Carton - Pieza/Caja

1 (1 pal.)

**Service-Info**



# Filter Cart

Fuel Purifier Cart - Kraftstofffilter Kart  
Filtre/Carbur Panier - Filtro/Combs Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

FUEL DECONTAMINATION LABORATORY

Purifies: DIESEL, BIODIESEL  
Used to filter and purify very badly contaminated fuel that contains water fungi, algae, dirt & other contaminants

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) FG105 (5μ)  
Metal frame mount with wheels  
FILTRATION: 8 step filtration process with different media starting with 300μ metallic element screen and down to 2μ and water separation.  
Special magnet filters remove fungi  
4 stage centrifuge process

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Pump Type Main: Self Suction 220 VCA  
Main pump includes priming pump & final product delivery pump.  
1400W diesel heating system & thermostat

Fluid Flow Rate (Ltrs) 2.5

Number - Nummer - Numero - Numero

## FUEL DECON



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
2150.00

Diameter - Durchmesser - Diametre - Diametro  
O.D. 1000.00 2310.00

Remarks - Bemerkung - Remarque - Observacione

Weight: 200 KG / 440 LBS

Pieces/Carton - Stück/Karton - Pieces/Carton - Pieza/Caja

1 (1 pal.)

Service-Info

# Filter Cart

Oil Purifier Cart - Ölreinigungswagen  
 Filtre à huile Cart - Filtr/Aceite Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

HYDRAULIC OIL TANKS FILTER SYSTEM

Purifies: HYDRAULIC OIL

Used to filter hydraulic storage tanks

Original No. - Original Nr. - No. d'origine - No. original

Filtration Type PRIMARY/SECONDARY

Filter Rating Primary 10µ

Filter Rating Secondary 5µ

Filter Element (Primary) WATER ABSORB

Filter Guage (Primary) YES

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Electric Motor Vca/Hz 220/50

Electric Protection IP-55

Suction: 2.5m (8.2')

Impusion: to 40m (131')

Fluid Flow Rate (Ltrs) 40

Fluid Flow Rate (Gals) 10.8

Number - Nummer - Numero - Numero

**HIDRADEP10-2**



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
 1000.00

Diameter - Durchmesser - Diametre - Diametro  
 O.D. 500.00 630.00

Remarks - Bemerkung - Remarque - Observacione

Inlet primary filter: 1-1/2" NPT  
 Outlet secondary filter: 1-1/2" NPT

Weight (dry): 32 KG / 70.55 LBS

Pieces/Cartron - Stück/Karton - Pieces/Cartron - Pieza/Caja

1 (1 pal.)

Service-Info

# Filter Cart

Oil Purifier Cart - Ölreinigungswagen  
Filtre à huile Cart - Filtr/Aceite Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

HYDRAULIC OIL TANKS FILTER SYSTEM

Purifies: HYDRAULIC OIL

Original No. - Original Nr. - No. d'origine - No. original

Filter Element (Primary) SUCTION SIDE

Filter Rating Primary 25µ

Filter Rating Secondary 10µ

Filter Guage (Secondary) YES

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Electric Motor Vca/Hz 220/50

Number - Nummer - Numero - Numero

**HIDRADEP ECO**

Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauteur - Altura  
1000.00Diameter - Durchmesser - Diametre - Diametro  
O.D. 350.00 600.00


Remarks - Bemerkung - Remarque - Observacione

Weight (dry): 8 KG / 17.64 LBS

Pieces/Carton - Stück/Karton - Peces/Carlton - Pieza/Caja

1 (1 pal.)

**Service-Info**



# Filter Cart

Oil Purifier Cart - Ölreinigungswagen  
Filtre à huile Cart - Filtr/Aceite Carrito

Date - Datum - Date - Fecha

06/2014

Application - Anwendung - Application - Aplicacion

HYDRAULIC OIL TANKS FILTER SYSTEM

Purifies: HYDRAULIC OIL

Used to filter hydraulic storage tanks

Original No. - Original Nr. - No. d'origine - No. original

Filter Rating Primary 10μ

Filter Rating Secondary 5μ

Filter Guage (Primary) YES

Crosses - Wettbewerb - Ref. Concurrence - Competencia

Electric Motor (Main) 4 HP

Electric Motor Vca/Hz 220/50

Electric Protection IP-55

Pump Type Main GEAR (SELF-VENTING)

Suction: 5m (16.4')

Fluid Flow Rate (Ltrs) 40

Fluid Flow Rate (Gals) 10.8

Number - Nummer - Numero - Numero

## HIDRADEPF1M



Measurements - Dimensionen - Dimensions - Dimensiones

Height - Höhe - Hauter - Altura  
1000.00

Diameter - Durchmesser - Diametre - Diametro  
O.D. 500.00 630.00

Remarks - Bemerkung - Remarque - Observacione

Inlet primary filter: 1-1/2" NPT

Outlet secondary filter: 1-1/2" NPT

Weight (dry): 70 KG / 154 LBS

Pieces/Carton - Stück/Karton - Pieces/Carton - Pieza/Caja

1 (1 pal.)

Service-Info